



# Google Pixel Screen Replacement

Replace the screen on a Google Pixel.

Written By: Richard Nguyen



## INTRODUCTION

If your screen is unresponsive, flickering, blank, or has dead pixels, replacing your screen may solve the problem.



### TOOLS:

- [iFixit Opening Tools](#) (1)
- [Spudger](#) (1)
- [T5 Torx Screwdriver](#) (1)
- [Tweezers](#) (1)
- [iOpener](#) (1)



### PARTS:

- [Google Pixel LCD Screen and Digitizer](#) (1)
- [Google Pixel Display Adhesive](#) (1)

## Step 1 — Screen




- Turn off the device.
- Heat and use an iOpener to soften the screen adhesive.
- Wedge an opening tool around the seam of the device to remove the screen.

## Step 2




- Slowly pull the screen off the device with your hands.
- ⚠ Be careful to not pull too hard on the ribbon cable behind the display when lifting the screen off of the device.

## Step 3

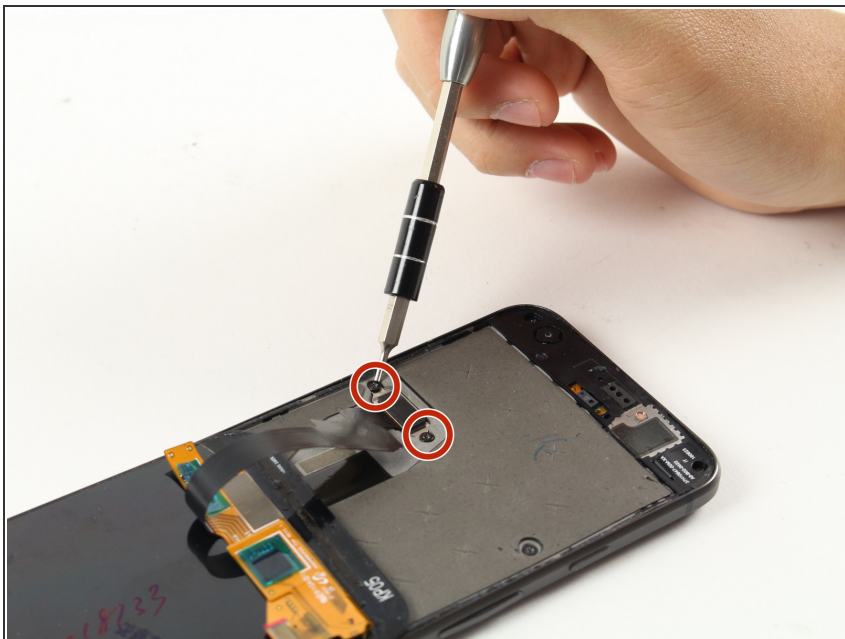

- Using a screwdriver, remove the two black 3.5 mm T5 screws holding the bracket in place.


## Step 4

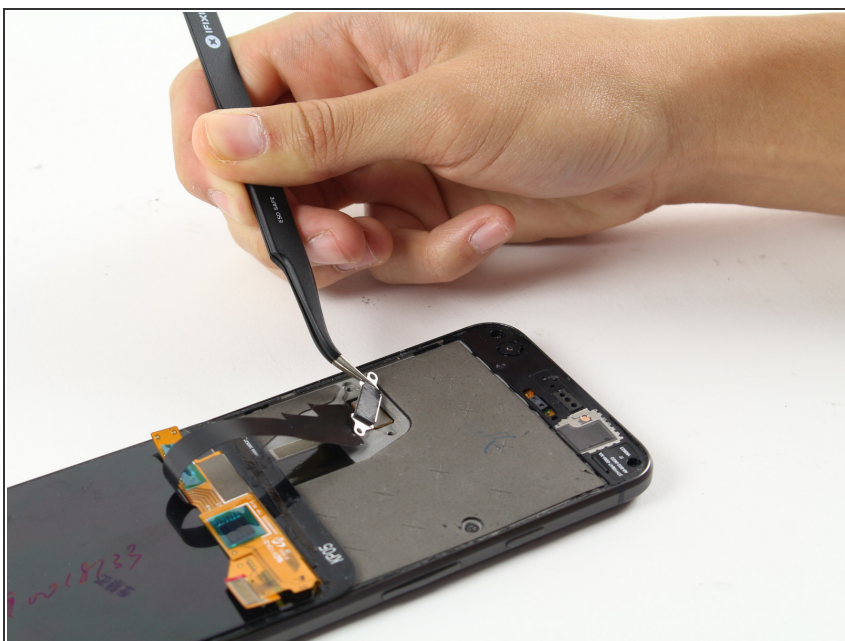

- Use tweezers to remove the bracket that holds the display connector in place.



## Step 5

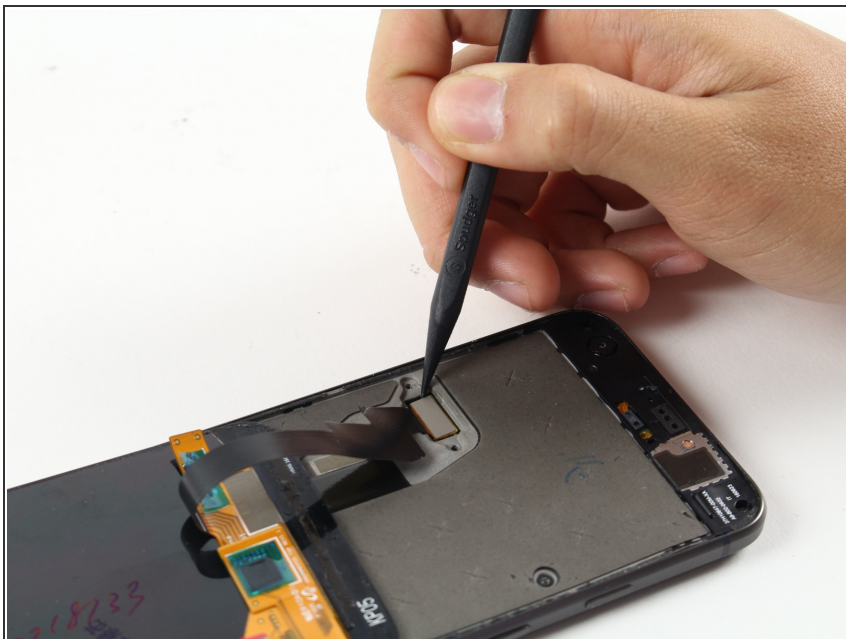

- Use a spudger to remove the connector from the device, and remove the screen completely.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-11-27 10:01:13 PM.